
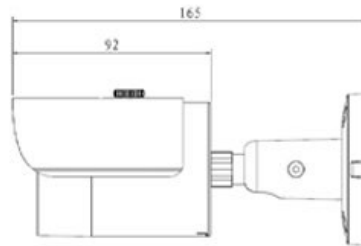


**CP- UNC-TA21L3****2 MP Full HD IR Bullet Camera - 30Mtr.****Main Features**

- 1/2.7" 2MP PS CMOS Image Sensor
- Max 25fps@1080P
- H.264 and MJPEG dual-stream encoding
- DWDR, Day/Night(ICR), Auto Iris, 3DNR, AWB, AGC, BLC
- 3.6mm fixed lens (6mm optional)
- IR Range of 30 Mtrs, IP67, PoE
- Mobile Software: iCMOB, gCMOB, wCMOB
- CMS Software: KVMS Pro, vOptimus Pro



# CP- UNC-TA21L3

2 MP Full HD IR Bullet Camera - 30Mtr.



## Feature

Image Sensor  
 Minimum Illumination  
 Effective Pixels  
 Shutter Speed  
 White Balance  
 Gain Control(AGC)  
 Lens  
 Back Light Compensation  
 S/N Ratio  
 Video Compression  
 Video Streaming  
 Resolution  
 Privacy Mask  
 ICR  
 Bit Rate  
  
 Protocol  
  
 Ethernet  
 User Account  
 Smart Phone  
 IR  
 Operating Temperature  
 Power Source  
 Power Consumption  
 Weatherproof Standard  
 Dimension  
 Weight

## Specification

1/2.7" 2MP Progressive scan CMOS  
 0.01Lux/F2.1(Color), 0Lux/F2.1(IR on)  
 1920(H) x 1080(V), 2 Megapixels  
 Auto/Manual, 1s~1/100000s  
 Auto/Manual  
 Auto/Manual  
 3.6mm (6mm optional)  
 BLC/ HLC/ DWDR  
 More than 50dB  
 H.264/ H.264H/ H.264B/ MJPEG  
 Main Stream: 1080P(1 ~ 25/30fps), Extra Stream: D1/CIF(1 ~ 25/30fps)  
 1080P(1920x1080)/720P(1280x720)/D1(704x576/704x480)/CIF(352x288/352x240)  
 Up to 4 areas  
 Auto(ICR)/Color/B/W  
 H.264: 4kbps~8192bps  
  
 IPv4/IPv6, HTTP, HTTPS, SSL, TCP/IP, UDP, UPnP, ICMP, IGMP, SNMP, RTSP, RTP, SMTP, NTP, DHCP, DNS, PPPOE, DDNS, FTP, IP Filter, QoS, Bonjour, ONVIF, PSIA, CGI  
  
 RJ-45 (10/100Base-T)  
 20 Users  
 iPhone, iPad, Android, Windows Phone  
 IR Range of 30 Mtr.  
 -30°C~+60°C , Less than 95%RH  
 DC12V, PoE (802.3af)  
 <4.8W(IR on)  
 IP67  
 Ø70mm×165mm  
 0.38Kg(0.44 with packaging)

