
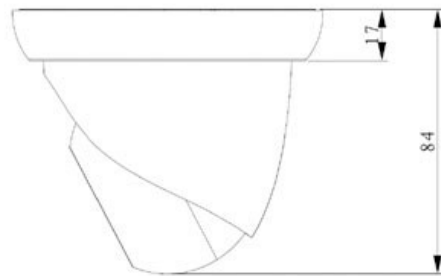


CP-UNC-DA31L3**3 MP Full HD IR Dome Camera - 30Mtr.****Main Features**

- 1/3" 3MP PS CMOS Image Sensor
- Max 25fps@1080P
- H.264 and MJPEG dual-stream encoding
- DWDR, Day/Night(ICR), Auto Iris, 3DNR, AWB, AGC, BLC
- 3.6mm fixed lens (6mm optional)
- IR Range of 30 Mtrs, IP67, PoE
- Mobile Software: iCMOB, gCMOB, wCMOB
- CMS Software: KVMS Pro, vOptimus Pro

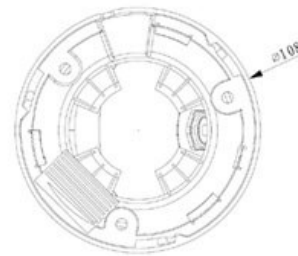

CP- UNC-DA31L3

3 MP Full HD IR Dome Camera - 30Mtr.



Feature

Image Sensor
Minimum Illumination
Shutter Speed
White Balance
Gain Control(AGC)
Lens
Back Light Compensation
S/N Ratio
Video Compression
Video Streaming
Resolution
Privacy Mask
ICR

Specification

1/3" 3MP Progressive scan CMOS
0.01Lux/F2.1(Color), 0Lux/F2.1(IR on)
Auto/Manual, 1s~1/100000s
Auto/Manual
Auto/Manual
3.6mm (2.8mm, 6mm optional)
BLC/ HLC/ DWDR
More than 50dB
H.264/MJPEG
Main Stream: 3M(1 ~ 20fps)/1080P(1 ~ 25/30fps), Extra Stream: D1/CIF(1 ~ 25/30fps)
3M(2048×1536)/1080P(1920×1080)/720P(1280×720)/D1(704×576/704×480)/CIF
Up to 4 areas
Auto(ICR)/Color/B/W

IPv4/IPv6, HTTP, HTTPS, SSL, TCP/IP, UDP, UPnP, ICMP, IGMP, SNMP, RTSP, RTP, SMTP, NTP, DHCP, DNS, PPPoE, DDNS, FTP, IP Filter, QoS, Bonjour, ONVIF, PSIA, CGI

RJ-45 (10/100Base-T)
20 Users

IR Range of 30 Mtr.
iPhone, iPad, Android, Windows Phone
-30°C~+60°C , Less than 95%RH
DC12V, PoE (802.3af)
<3.8W(IR on)
IP67
Φ108mm×84mm
0.25Kg(0.38 with packaging)

Protocol

Ethernet
User Account
IR
Smart Phone
Operating Temperature
Power Source
Power Consumption
Weatherproof Standard
Dimension
Weight