
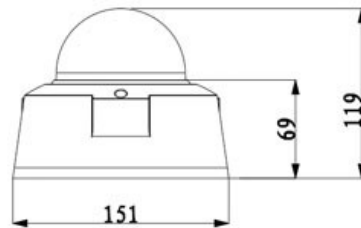


CP- UNC-VE30FL2-M**3 MP Full HD IR Vandal Dome Camera - 20Mtr.****Main Features**

- 1/3" 3MP PS CMOS Image Sensor
- Max 20fps@3M and 25/30fps@1080P
- H.264 and MJPEG dual-stream encoding
- DWDR, Day/Night(ICR), Auto Iris, 3DNR, AWB, AGC, BLC
- 2.7 -12mm Varifocal Lens
- IR Range of 20 Mtrs, Micro SD, IP66, IK10, PoE
- Mobile Software: iCMOB, gCMOB, wCMOB
- CMS Software: KVMS Pro, vOptimus Pro



CP- UNC-VE30FL2-M

3 MP Full HD IR Vandal Dome Camera - 20Mtr.

Feature

Image Sensor
 Minimum Illumination
 Shutter Speed
 White Balance
 Lens
 Gain Control(AGC)
 Video Compression
 Back Light Compensation
 S/N Ratio
 Video Streaming
 Resolution
 Privacy Mask
 ICR
 Audio Input
 Audio Output
 Audio Compression
 Alarm IN
 Alarm Out

Specification

1/3" 3MP Progressive scan CMOS
 Color: 0. 1Lux/F1.2, B/W: 0.01Lux/F1.2; 0Lux/F1.2(IR on)
 Auto/Manual, 1/3(4)~1/10000s
 Auto
 2.7 -12mm Lens
 Auto/Manual
 H.264/MJPEG
 BLC/ HLC/ DWDR
 More than 50dB
 Main Stream: 3M(1~20fps)/1080P/720P(1~25/30fps), Extra Stream: D1/CIF(1 ~ 25/30fps)
 3M(2048× 1536)/1080P(1920× 1080) / 720P(1280× 720) /D1(704× 576) /CIF(352× 288)
 Up to 4 areas
 Auto(ICR)/Color/B/W
 1 Channel
 1 Channel
 G.711a / G.711u/ PCM
 1 Channel
 1 Channel

Protocol

IPv4/IPv6, HTTP, HTTPS, SSL, TCP/IP, UDP, UPnP, ICMP, IGMP, SNMP,RTSP, RTP, SMTP, NTP, DHCP, DNS, PPPOE, DDNS, FTP, IP Filter, QoS,Bonjour, ONVIF, PSIA, CGI

Ethernet

RJ-45 (10/100Base-T)

User Account

20 Users

IR

IR Range of 20 Mtr.

Smart Phone

iPhone, iPad, Android, Windows Phone

Micro SD

Micro SD, Max 64GB

Operating Temperature

-20°C~+60°C , Less than 90%RH

Power Source

DC12V/AC24V, PoE(802.3af)

Power Consumption

Max 5W

Weatherproof Standard

IP66 & IK10

Dimension

Φ151mm× 119mm

Weight

1.25Kg.