
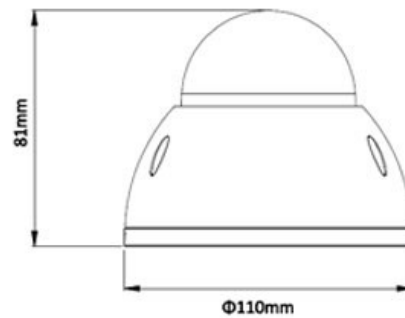


**CP- UNC-VD13L3-M****1.3 MP HD IR Vandal Dome Camera - 30Mtr.****Main Features**

- 1/3" 1.3Megapixel PS CMOS Image Sensor
- Max 25/30fps@1.3MP
- H.264 and MJPEG dual-stream encoding
- DWDR, Day/Night(ICR), 3DNR, AWB, AGC, BLC
- Smart Detection supported
- 3.6mm fixed lens (2.8mm, 6mm optional)
- IR Range of 30 Mtrs, IP67, IK10, PoE
- Mobile Software: iCMOB, gCMOB, wCMOB
- CMS Software: KVMS Pro, vOptimus Pro



# CP-UNC-VD13L3-M

1.3 MP HD IR Vandal Dome Camera - 30Mtr.



Feature	Specification
Image Sensor	1/3" 1.3Megapixel progressive scan CMOS
Minimum Illumination	0.01Lux/F2.0 (Color), 0Lux/F2.0(IR on)
Shutter Speed	Auto/Manual, 1/3(4)~1/10000s
White Balance	Auto/Manual
Gain Control(AGC)	Auto/Manual
Lens	3.6mm(2.8mm, 6mm optional)
Back Light Compensation	BLC / HLC / DWDR
S/N Ratio	More than 50dB
Video Streaming	Main Stream: 1.3M/720P(1 ~ 25/30fps), Extra Stream: D1/CIF(1 ~ 25/30fps), Third Stream: 720P(1~13/4fps)
Resolution	1.3M(1280x960)/720P(1280x 720)/ D1(704x 576/704x 480) /CIF(352x 288/352x 240)
Privacy Mask	Up to 4 areas
ICR	Auto(ICR)/Color/B/W
Audio Input	1 Ch.
Audio Compression	G.711a / G.711u / PCM
Audio Output	1 Ch.
Alarm IN	1 Ch.
Alarm Out	1 Ch.
Protocol	IPv4/IPv6, HTTP, HTTPS, SSL, TCP/IP, UDP, UPnP, ICMP, IGMP, SNMP,RTSP, RTP, SMTP, NTP, DHCP, DNS, PPPOE, DDNS, FTP, IP Filter, QoS,Bonjour, ONVIF, PSIA, CGI
Smart Detection	Tripwire, Intrusion, Scene Change, Face detect
Ethernet	RJ-45 (10/100Base-T)
User Account	20 Users
IR	IR Range of 30 Mtr.
Smart Phone	iPhone, iPad, Android, Windows Phone
Micro SD	Micro SD, Max 128GB
Operating Temperature	-40°C~+60°C, Less than 95% RH
Power Source	DC12V, PoE (802.3af)
Power Consumption	Max 4W
Weatherproof Standard	IP67 & IK10
Dimension	Φ110mm × 81mm
Weight	0.33kg(with package 0.47kg)

