
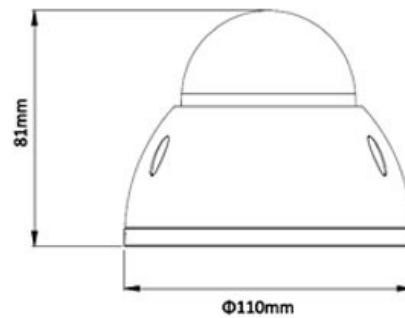


CP- UNC-VD20L3-M**2 MP Full HD IR Vandal Dome Camera - 30Mtr.****Main Features**

- 1/2.8" 2Megapixel PS CMOS Image Sensor
- Max 25/30fps@1080P
- H.264 and MJPEG dual-stream encoding
- DWDR, Day/Night(ICR), 3DNR, AWB, AGC, BLC
- Smart Detection supported
- 3.6mm fixed lens (2.8mm, 6mm optional)
- IR Range of 30 Mtrs, IP67, IK10, PoE
- Mobile Software: iCMOB, gCMOB, wCMOB
- CMS Software: KVMS Pro, vOptimus Pro



CP-UNC-VD20L3-M

2 MP Full HD IR Vandal Dome Camera - 30Mtr.

Feature

Image Sensor
 Minimum Illumination
 Shutter Speed
 White Balance
 Gain Control(AGC)
 Lens
 Back Light Compensation
 S/N Ratio
 Video Streaming
 Resolution
 Privacy Mask
 ICR
 Audio Input
 Audio Compression
 Audio Output
 Alarm IN
 Alarm Out
 Protocol
 Smart Detection
 Ethernet
 User Account
 IR
 Smart Phone
 Micro SD
 Operating Temperature
 Power Source
 Power Consumption
 Weatherproof Standard
 Dimension
 Weight

Specification

1/2.8" 2Megapixel progressive scan CMOS
 0.01Lux/F2.0(Color), 0Lux/F2.0(IR on)
 Auto/Manual, 1/3(4)~1/10000s
 Auto/Manual
 Auto/Manual
 3.6mm(6mm optional)
 BLC / HLC / DWDR
 More than 50dB
 Main Stream: 1080P/720P(1~25/30fps), Extra Stream: D1/CIF(1 ~ 25/30fps), Third Stream: 720P(1~13/4fps)
 1080P(1920× 1080) / 720P(1280× 720) / D1(704× 576/704× 480)/ CIF(352× 288/352× 240)
 Up to 4 areas
 Auto(ICR)/Color/B/W
 1 Channel
 G.711a / G.711u
 1 Channel
 1 Channel In
 1 Channel Out
 IPv4/IPv6, HTTP, HTTPS, SSL, TCP/IP, UDP, UPnP, ICMP, IGMP, SNMP,RTSP, RTP, SMTP, NTP, DHCP, DNS, PPPoE, DDNS, FTP, IP Filter, QoS,Bonjour, ONVIF, PSIA, CGI
 Tripwire, Intrusion, Scene Change, Face detect
 RJ-45 (10/100Base-T)
 20 Users
 IR Range of 30 Mtr.
 iPhone, iPad, Android, Windows Phone
 Max 64GB
 -40°C~+60°C, Less than 95% RH
 DC12V, PoE (802.3af)
 Max 5W
 IP67 & IK10
 Φ110mm × 81mm
 0.33kg(with package 0.47kg)