
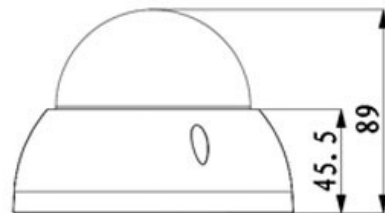


CP-UNC-VB30FL3**3 MP Full HD IR Vandal Dome Camera - 30Mtr.****Main Features**

- 1/3" 3MP PS CMOS Image Sensor
- Max 20fps@3M and 25/30fps@1080P
- H.264 and MJPEG dual-stream encoding
- DWDR, Day/Night(ICR), Auto Iris, 3DNR, AWB, AGC, BLC
- 2.8 -12mm Varifocal Lens
- IR Range of 30 Mtrs, IP66, IK10, PoE
- Mobile Software: iCMOB, gCMOB, wCMOB
- CMS Software: KVMS Pro, vOptimus Pro



CP- UNC-VB30FL3

3 MP Full HD IR Vandal Dome Camera - 30Mtr.

Feature

Image Sensor

Minimum Illumination

Shutter Speed

White Balance

Lens

Gain Control(AGC)

Back Light Compensation

S/N Ratio

Video Compression

Video Streaming

Resolution

Privacy Mask

ICR

Protocol

Ethernet

User Account

Smart Phone

IR

Operating Temperature

Power Source

Power Consumption

Weatherproof Standard

Dimension

Weight

Specification

1/3" 3MP Progressive scan CMOS

0.01Lux/F1.4(Color), 0Lux/F1.4(IR on)

Auto/Manual, 1/3(4)~1/10000s

Auto/Manual

2.8 -12mm Varifocal Lens

Auto/Manual

BLC/ HLC/ DWDR

More than 50dB

H.264/MJPEG

Main Stream: 3M(1 ~ 20fps)/1080P (1 ~ 25/30fps), Extra Stream: D1/CIF(1 ~ 25/30fps)

3M(2048x1536) / 1080P(1920x1080) / 1.3M(1280x960) / 720P(1280x720) / D1
(704x576/704x480) / CIF(352x288/352x240)

Up to 4 areas

Auto(ICR)/Color/B/W

IPv4/IPv6, HTTP, HTTPS, SSL, TCP/IP, UDP, UPnP, ICMP, IGMP, SNMP, RTSP, RTP, SMTP, NTP,
DHCP, DNS, PPPOE, DDNS, FTP, IP Filter, QoS, Bonjour, ONVIF, PSIA, CGI

RJ-45 (10/100Base-T)

20 Users

iPhone, iPad, Android, Windows Phone

IR Range of 30 Mtr.

-30°C~+60°C, Less than 95%RH

DC12V, PoE (802.3af)

<4.5W

IP66 & IK10

φ122mm × 89mm

500g