
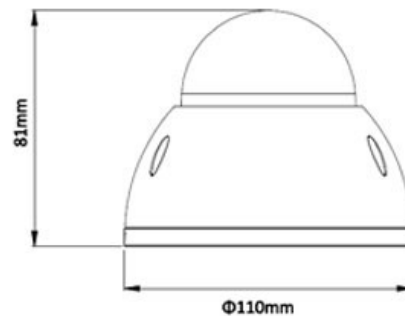


CP-UNC-VD40L3-MD**4 MP Full HD WDR IR Vandal Dome Camera - 30Mtr.****Main Features**

- 1/3" 4Megapixel PS CMOS Image Sensor
- 20fps@4MP, 25/30fps@3MP
- H.264 and MJPEG dual-stream encoding
- WDR(120dB), Day/Night(ICR), 3DNR, AWB, AGC, BLC
- 3.6mm fixed lens (2.8mm, 6mm optional)
- IR Range of 30 Mtrs, IP67, PoE
- Mobile Software: iCMOB, gCMOB, wCMOB
- CMS Software: KVMS Pro, vOptimus Pro



CP- UNC-VD40L3-MD

4 MP Full HD WDR IR Vandal Dome Camera - 30Mtr.

Feature

Image Sensor
 Minimum Illumination
 Shutter Speed
 White Balance
 Lens
 Gain Control(AGC)
 S/N Ratio
 Back Light Compensation
 Video Compression
 Video Streaming
 Resolution
 Privacy Mask
 ICR
 Audio Input
 Audio Output
 Audio Compression
 Alarm IN
 Alarm Out
 Protocol
 Smart Detection
 Ethernet
 User Account
 IR
 Smart Phone
 Micro SD
 Operating Temperature
 Power Source
 Power Consumption

Specification

1/3" 4Megapixel progressive scan CMOS
 0.01Lux/F2.1(Color), 0Lux/F2.1(IR on)
 Auto/Manual, 1/3(4)~1/10000s
 Auto/Manual
 3.6mm(2.8mm, 6mm optional)
 Auto/Manual
 More than 50dB
 BLC / HLC / WDR(120dB)
 N/A
 Main Stream: 4M(1~20fps)/3M(1~25/30fps), Extra Stream: D1/CIF(1 ~ 25/30fps), Third Stream: 720P(1-5/8fps) (WDR on), 720P(1-18/2fps) (WDR off)
 4M(2560× 1440)/3M(2304× 1296)/1080P(1920× 1080)/720P(1280×720)/D1(704× 576/704× 480) /CIF(352× 288/352× 240)
 Up to 4 areas
 Auto(ICR)/Color/B/W
 1 Ch.
 1 Ch.
 G.711a / G.711u
 1 Ch.
 1 Ch.
 IPv4/IPv6, HTTP, HTTPS, SSL, TCP/IP, UDP, UPnP, ICMP, IGMP, SNMP,RTSP, RTP, SMTP, NTP, DHCP, DNS, PPPOE, DDNS, FTP, IP Filter, QoS,Bonjour, ONVIF, PSIA, CGI
 Tripwire, Intrusion, Scene Change, Face detect
 RJ-45 (10/100Base-T)
 20 Users
 IR Range of 30 Mtr.
 iPhone, iPad, Android, Windows Phone
 Micro SD, Max 64GB
 -40°C~+60°C, Less than 95% RH
 DC12V, PoE (802.3af)
 Max 5W

 **CP- UNC-VD40L3-MD****4 MP Full HD WDR IR Vandal Dome Camera - 30Mtr.****Feature**

Weatherproof Standard

Dimension

Weight

Specification

IP67

Φ110mm× 81mm

0.33Kg(with package 0.47Kg)