
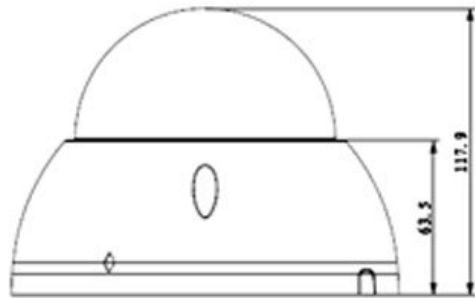


**CP- UNC-VE21ZL5-MD****2 MP Full HD WDR IP IR Vandal Dome Camera - 50 Mtr.****Main Features**

- 1/2.7" 2Megapixel PS CMOS Image Sensor
- H.265 / H.264 / MJPEG triple-stream encoding
- Max 25/30fps@1080P(1920×1080)
- WDR(120dB), Day/Night(ICR), 3D-DNR, AWB, AGC, BLC
- IR Range of 50 Mtrs.
- 2.7mm ~12mm motorized lens
- Supports PoE, IP67, IK10, Micro SD Card
- Mobile Software: iCMOB, gCMOB, wCMOB
- CMS Software: KVMS Pro, vOptimus Pro



**CP- UNC-VE21ZL5-MD****2 MP Full HD WDR IP IR Vandal Dome Camera - 50 Mtr.****Feature**

Image Sensor  
Minimum Illumination  
Shutter Speed  
White Balance  
Gain Control(AGC)  
Lens  
Video Compression  
S/N Ratio  
Back Light Compensation  
Video Streaming  
Resolution  
Privacy Mask  
ICR  
Audio Input  
Audio Compression  
Audio Output  
Alarm IN  
Alarm Out  
Protocol  
Smart Detection  
Ethernet  
User Account  
IR  
Smart Phone  
Micro SD  
Operating Temperature  
Power Source  
Power Consumption  
Weatherproof Standard

**Specification**

1/2.7" 2 Megapixel CMOS  
0.01Lux/F1.4(Color); 0Lux/F1.4(IR on)  
Auto/Manual, 1/3(4)~1/10000s  
Auto/Manual  
Auto/Manual  
2.7mm~12mm Motorized  
H.265/H.264/H.264H/H.264B/MJPEG  
More than 50 dB  
BLC / HLC / WDR(120dB)  
Main Stream:1080P(1 ~ 25/30fps), Sub Stream: D1(1 ~ 25/30fps), Third Stream: 720P(1-5/8fps)(WDR on), 720P(1-18/2fps)(WDR off)  
1080P(1920×1080)/720P(1280×720)/D1(704×576)/CIF(352×288)  
Up to 4 areas  
Auto(ICR)/Color/B/W  
1 Ch.  
G.711a/ G.711u/ AAC  
1 Ch.  
2 Ch.  
1 Ch.  
IPv4/IPv6, HTTP, HTTPS, SSL, TCP/IP, UDP, UPnP, ICMP, IGMP, SNMP,RTSP, RTP, SMTP, NTP, DHCP, DNS, PPPOE, DDNS, FTP, IP Filter, QoS, Bonjour, ONVIF Profile S  
Tripwire, Intrusion, Scene Change, Face Detect  
RJ-45 (10/100Base-T)  
20 users  
IR Range of 50 Mtr.  
iPhone, iPad, Android, Windows Phone  
Micro SD, Max 128GB  
-40°C~+60°C, Less than 95% RH  
DC12V(AC24V optional),PoE (802.3af)  
Max 10W (with IR on, motorized lens working)  
IP67 & IK10

 **CP- UNC-VE21ZL5-MD****2 MP Full HD WDR IP IR Vandal Dome Camera - 50 Mtr.****Feature**

Regulatory

Dimension

Weight

**Specification**

CE, FCC and RoHS

Φ122mm × 89mm

0.7kg